

Perforza

Maximum performance
with one extra quality:
that of being ISEO.

Perforza



HOW IT PERFORMS.

IT'S EUROPEAN.

PERFORMA by Iseo has been conceived and developed to meet the requirements of the European market by adopting two different

centre distances: 85 and 92 mm.

It can be operated by an euro-profile cylinder with straight or 45° projecting cam.

IT'S SOLID AND WEATHER SEAL COMPRESSED.

The top and bottom lock housings incorporate low friction chamfered sliding deadbolts providing a perfect alignment into the keeps. The unique locking action of these chamfered bolts when combined with the latest generation of profiles, helps maintain weather seal compression for better thermal insulation and energy saving.



IT'S COMPATIBLE.


The lockcase has a width of 15 mm and, therefore, suits any type of applications for different frames materials.

IT'S SEALED.

The lockcase is closed on all sides: this stops profile machining chips from entering the mechanism.



Version with hardened deadbolts available on demand, providing greater resistance against cutting and drilling.

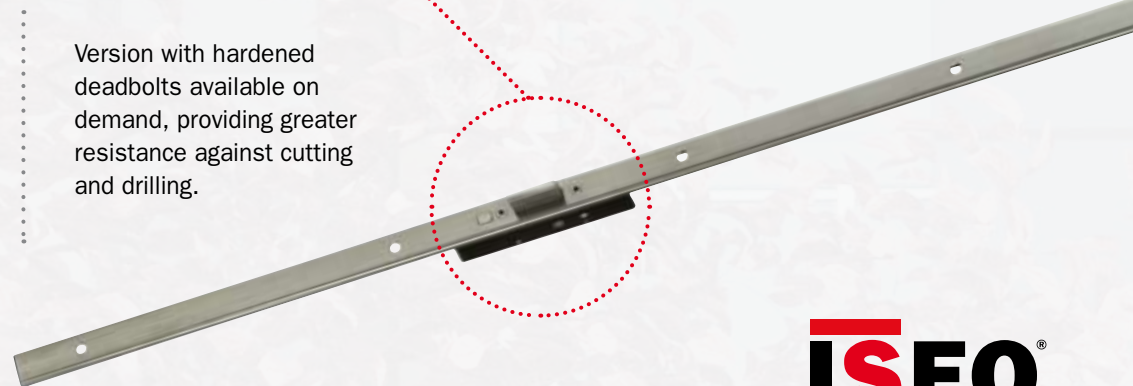

ISEO[®]



A WINNER IN TESTS.

It has been designed and tested according with European standards

EN 12209 and **prEN 15685.**

RESISTANCE: it resists lateral forcing with a thrust of over 1,000 kg and a front load of over 600 kg.

The corrosion resistance is more than 240 hours in a saline environment.

ENDURANCE: tested to over 200,000 opening and closing cycles under load.

OPERATING FORCES: the soft feel cylinder action with low operating forces to turn the key is well below the average.

AN EXTRA ACCESSORY.

PERFORMA is designed to be fitted with security escutcheon providing additional protection for the cylinder. A complete range of adjustable striking plates is also available.



EASY LOCKING.

The gear box allows for a smoother and **easier operation whilst turning the key during opening and closing.**

CARE FOR DETAIL.

The forend plate is made of coated steel or stainless steel while the latch, roller and deadbolt are galvanised.


IT'S WELL EQUIPPED.

As in the best tradition of Iseo, PERFORMA is well equipped with

accessories to modify the lock:


with a latch, a roller or a blanking cap for deadbolt only action.

Such a versatile lock makes for streamlined stockholding.

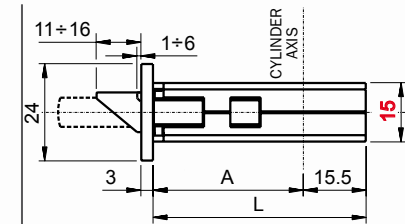


Lock flat faceplate 24 X 3

Backset	A	L	Ld
25	22	37,5	
30	27	42,5	
35	32	47,5	37,5
40	37	52,5	
45	42	57,5	
50	47	62,5	

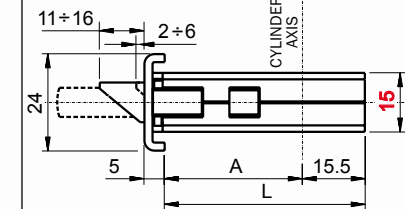

Lock "U" faceplate 24 X 5

Backset	A	L	Ld
25	19	34,5	
30	24	39,5	
35	29	44,5	34,5
40	34	49,5	
45	39	54,5	
50	44	59,5	

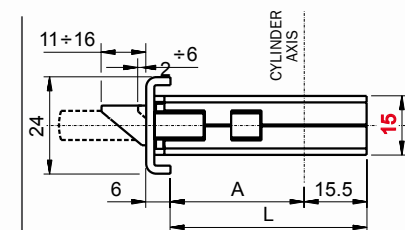

Lock "U" faceplate 24 X 6

Backset	A	L	Ld
25	19	33,5	
30	23	38,5	
35	28	43,5	33,5
40	33	48,5	
45	38	53,5	
50	43	58,5	

Iseo Serrature s.p.a.

Via San Girolamo 13
25055 Pisogne (BS)
ITALY
Tel. + 39 0364 8821
Fax + 39 0364 882263
iseo@iseo.eu

Cerraduras Iseo Ibérica S.L.

Pol. Ind. Las Marineras
Nave No. 2/4/6
28864 Ajalvir - Madrid
SPAIN Tel. + 34 91 8843200
Fax + 34 91 8843003
iseo@iseoiberica.es

Fiam s.r.l.

Via Don Fassola 4
22069 Rovellasca (CO)
ITALY
Tel. + 39 02 96740420
Fax + 39 02 96740309
info.fiam@iseo.eu

Iseo France s.a.s.

11111, rue du Maréchal Juin
BP 560 Vaux le Pénil
77006 Melun Cédex FRANCE
Tel. + 33 1 64835858
Fax + 33 1 64879685
city.iseofrance@iseo.eu

Levasseur Systèmes s.a.

7 rue des Coutures
BP 35 Torcy
77201 Marne La Vallée
Cedex 1 FRANCE
Tel. +33 1 60953910
Fax +33 1 60953935
contact@levasseur-vass.com

Iseo Asia Ltd. Hong Kong

Correspondence Address:
17-19 Jalan 22, Taman Bkt. Kuchai
47100 Puchong, Selangor DE
MALAYSIA
Tel. + 603 8075 3331
Fax + 603 8075 9333
info@iseoasia.com

Iseo Deutschland GmbH

Wiesestraße 190
07548 Gera
GERMANY
Tel. + 49 365 73620
Fax + 49 365 7362151
iseo.gera@iseo.eu

Iseo Middle East F.Z.E.

P.O. Box 61390
Jebel Ali, DUBAI
United Arab Emirates
Tel. + 9 714 2957220
Fax + 9 714 2957166
iseome@emirates.net.ae

Iseo Beijing

Arch. Hardware Co.Ltd.
Room 2904 Bldg 11 Jianwai Soho 39 East 3RD
Ring Road - Chaoyang District - Beijing
CHINA 100021
Tel. + 86 10 58698079
Fax + 86 10 58698079
admin.cn@iseoasia.com

Perforza

With such standings,
how could we name it different
from PERFORMA?

