

IS115

PRODUCT:

Door closer with sliding arm.

APPLICATION:

For single action door (right and left opening).

For doors where aesthetics is important.

For both outside and inside doors.

KEY POINTS:

Quick and easy to install, this door closer is suitable for fire resistant doors according to the European market.

Two valves adjust the closing speed on two separate areas.



Backcheck valve enables to protect door and wall against sudden openings due to wind effect.

All valves on front face for an easy adjustment.

Force screw to adjust the door strength and to be well suited to user's needs. Its new design enhances the door.

CERTIFICATION:

CE marking

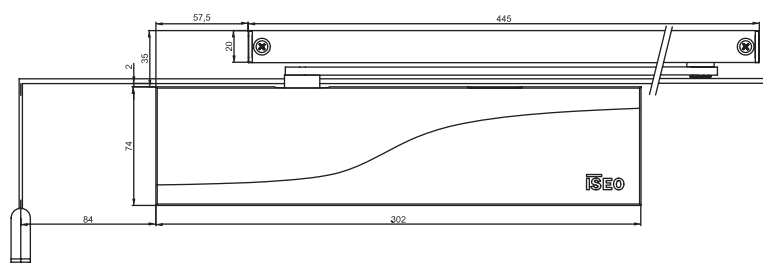

TECHNICAL FEATURES:

Force:

- 2-4 for doors max width 1100 mm
- Change force by screw

Opening max:

- 180°

Valves adjustment:

- Closing speed (180°-15°)
- Latching action (15°-0°)
- Backcheck

Version:

- Standard version with sliding arm
- Reverse version with sliding arm
- Hold open unit in option
- Cushioned limit stay in option

Colour version:

- Silver
- White (except for reverse version)
- Black (except for reverse version)

Dimension:

- 302x74x51,5 (body)