

# IS315



## PRODUCT:

Door closer with standard arm.

## APPLICATION:

For single action door (right and left opening).

For doors where aesthetics is important.

For both outside and inside doors.

For doors where you need more time to pass through.

For heavy doors (less than 160kg).

## KEY POINTS:

Quick and easy to install, this door closer is suitable for fire resistant doors according to the European market. Several valves adjust the closing speed on separate areas.

The delayed closing action valve enables to give an extra time before normal closing (convenient for hospitals, retirement homes...)

General closing speed and latching valves are common adjustment valves for the closing process.



Backcheck valve enables to protect door and wall against sudden openings due to wind effect.

All valves on front face for an easy adjustment.

Force screw to adjust the door strength and to be well suited to users' needs. Its new design enhances the door.

## CERTIFICATION:

CE marking

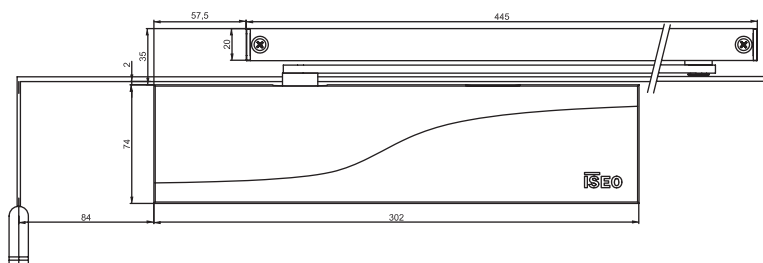

# ISEO®

## TECHNICAL FEATURES:

### Force:

- 3-5 for doors max width 1250 mm
- Change force by screw

### Opening max:

- 180°

### Valves adjustment:

- Closing speed (180°-15°)
- Latching action (15°-0°)
- Backcheck
- Delayed closing action

### Version:

- Standard version with sliding arm
- Reverse version with sliding arm
- Hold open unit in option
- Cushioned limit stay in option

### Colour version:

- Silver
- White (except for reverse version)
- Black (except for reverse version)

### Dimension:

- 302x74x51,5 (body)

www.iseo.com